







Reactive

Balancer for tools, screwdrivers, products from 1 up to 50 kg

Rigid arm with pneumaticaly balanced parallelogramm.

Brakes on all rotating axes

Electronic control on working cycle

Max torque resistance 500 Nm



FAMATEC

PRODUCTS

Mastro

Friendly

Pzero

Gingo

Vaquo

Mano


Magneto

FAMATEC S.p.A.

Via dell'Industria, 15 38012 Taio (TN) Italy T. +39 0463 461911 www.famatec.com

sales@famatec.com



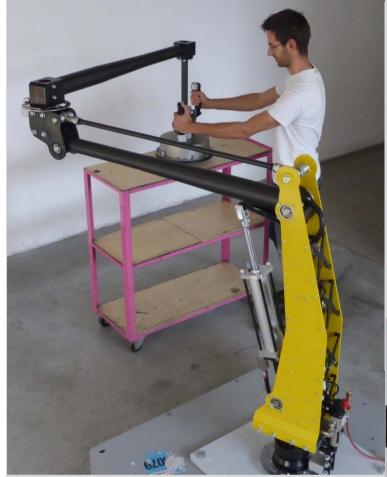

Reach radius: 1.400 mm - 2.000 mm

Capacity: from 1 to 50 kg

Versions:

column fixed to the ground hanging running overhead on rails.

Air pressure request: 0,6 MPa (6 bar), clean, water and oil free.

